




# ScanSnap iX500



Scan and Save with  
a Mac or PC and  
Now Android or iOS.  
“Go PC-less!”

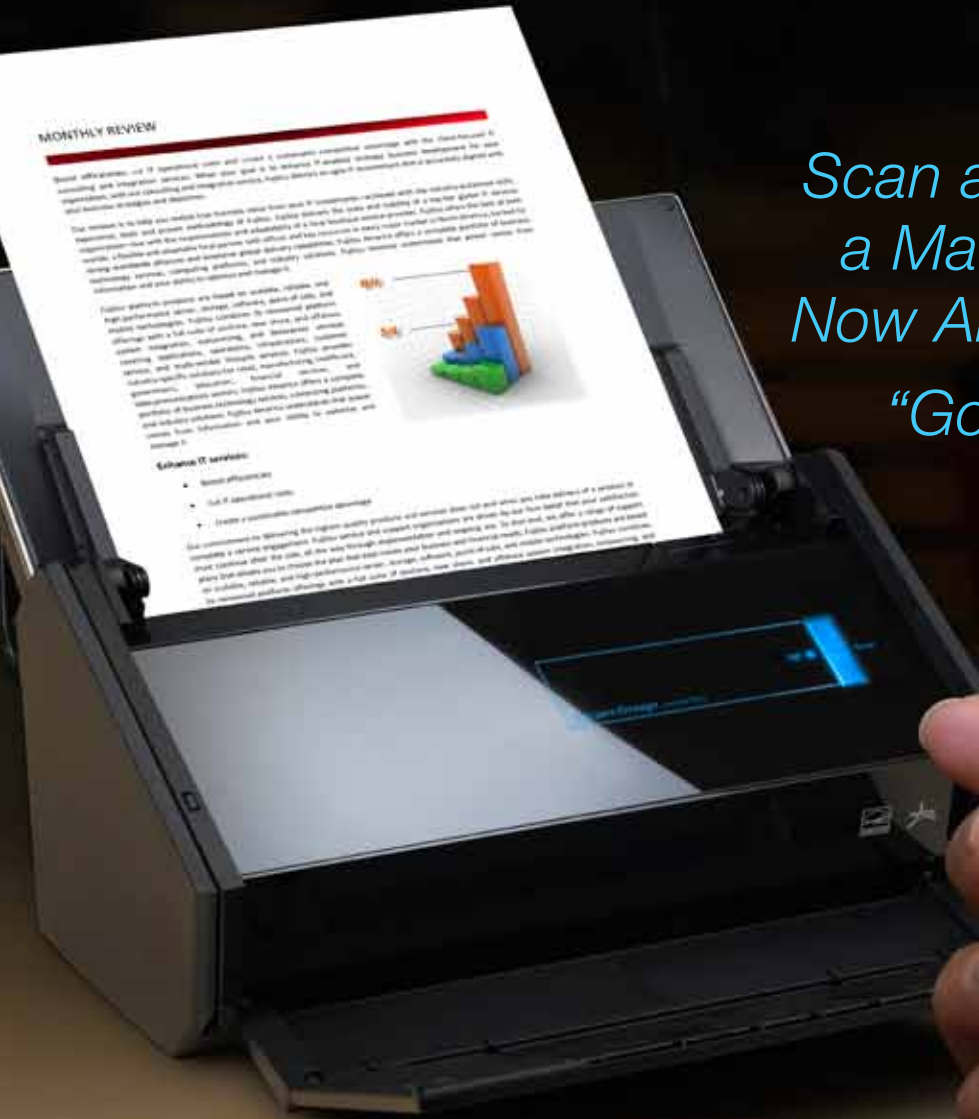

iOS



shaping tomorrow with you



# Simple, Fast & Powerful!

## Accelerate yourself with ScanSnap iX500!

### Runs on Windows® & Mac OS X computers

And now iOS and Android mobile device and tablets

### Easy One-button PDF creation

Just stack in the paperwork and press the scan button

### Handles a stack of documents

Load up to 50 sheets in the automatic document feeder

### Scans both sides of each page at the same time

Images are automatically straightened and cropped with blank sides removed

### Fast and reliable document scanning

Scans up to 25 pages per minute with advanced paper handling

### Scans business cards to oversized documents

With carrier sheet, scans A3 documents, photos, and much more



iOS



### Scan directly to mobile devices

Quickly bypass the computer to scan an image enhanced PDF or JPEG file directly to an iOS or Android mobile device or tablet.\*

### Built-in GI microprocessor

A dual-core CPU-mounted "GI" processor performs the intelligent image enhancement

responsible for great looking images with dramatically faster results and more sophisticated connectivity:

- Image processing: Automatic corrections and image output
- Supports Wi-Fi: WPS (Wi-Fi Protected Setup) wireless LAN (IEEE802.11b/g/n)
- Supports USB 3.0

\* See list of supported devices at <http://scansnap.fujitsu.com>



### Advanced paper feeding system

Inheriting the superior paper feeding technology of our professional-grade scanners, iX500 achieves exceptional feeding reliability using "Separation Roller" technology to minimize jams and multi-feeds.



### Ultrasonic multi-feed detection

For additional security and peace-of-mind, iX500 uses sound-waves to help ensure each page is scanned.

# ScanSnap iX500

## Quick Menu saves time!



Quick Menu for Windows® shown

The ScanSnap Quick Menu for PC and Mac automatically pops up after scanning to provide you a variety of ways to be immediately productive with your scans. It can be easily customized to display just your favorites, present a recommendation, and even display custom profiles.

## Accelerated Searchable PDF creation

Making PDF files searchable at the point of scanning is a great way to keep them instantly accessible and now you can create a searchable PDF at nearly the same speed as a standard PDF.



## Scan to Cloud

For the ultimate in accessibility to your scans across multiple platforms, computers and devices, iX500 provides operators a convenient way to scan directly to your existing Evernote, Dropbox, Google Docs, SugarSync and Salesforce accounts.



## Scan there! ScanSnap Folder

Scan to virtually any application or web service that can open, insert or attach a PDF or JPEG file from your Windows® computer.



## Organize business cards



CardMinder for Windows® shown

Scan, store, and edit business card information with the bundled CardMinder software for Mac and PC and even export data into other applications like Address Book, Excel, and Salesforce.

## ScanSnap iX500 Deluxe model



For Windows® users, Rack2-Filer Smart is a feature-rich scanning and content viewing application incorporating an ultra-intuitive bookcase and binder interface that gives users a familiar and enjoyable interaction with their scanned paperwork. Magic Desktop is designed to organize scans from ScanSnap as well as memos and images from mobile devices and upload your information to Facebook.



General Specifications		
Product Name / Part Number	ScanSnap iX500 / PA03656-B005	
Scanner Type	Automatic Document Feeder (ADF), Duplex Scanning	
Scanning Modes	Color, Grayscale, Monochrome, Automatic Detection (color / grayscale / monochrome <sup>3</sup> detection)	
Image Sensor	Color CIS (Contact Image Sensor) x 2 (front / back)	
Light Source	3 Color LED (Red / Green / Blue)	
Scanning Speed (A4 portrait) <sup>1</sup>	Auto Mode <sup>2</sup>	Simplex or Duplex, 25 pages per minute (ppm)
	Normal Mode	Color & Grayscale 150 dpi, Monochrome 300 dpi, Simplex/Duplex, 25 ppm
	Better Mode	Color & Grayscale 200 dpi, Monochrome 400 dpi, Simplex/Duplex, 25 ppm
	Best Mode	Color & Grayscale 300 dpi, Monochrome 600 dpi, Simplex/Duplex, 25 ppm
	Excellent Mode <sup>3</sup>	Color & Grayscale 600 dpi, Monochrome 1200 dpi, Simplex/Duplex, 7 ppm
Document size	Normal Mode without Carrier Sheet	A4, A5, A6, B5, B6, Business Card, Post Card, Letter, Legal and Custom Size. Max: 8.5 X 14.17 in. (216 X 360 mm), Min: 2 X 2 in. (50.8 X 50.8 mm) <sup>3</sup> . Automatically recognizes document size.
	Normal Mode with Carrier Sheet <sup>3</sup>	Use of a Carrier Sheet permits the scanning of A3, B4, 11 x 17 in. and photographs as well as the document sizes listed above
	Long Paper Scanning <sup>3,4</sup>	34 inches in length (863 mm)
Multi-feed detection	Supported (Standard) ultrasonic multi-feed detection sensor	
Paper Weight (Thickness)	<ul style="list-style-type: none"> <li>• 11 to 56 lb (40 to 209 g/m<sup>2</sup>)</li> <li>• A8 Size: 34 to 56 lb (127 to 209 g/m<sup>2</sup>)</li> <li>• Cards: (ISO7810 ID-1 type conforming) can be used. (thickness 0.76 mm or less)</li> <li>• Embossed card : useable (Landscape only)</li> </ul>	
Paper Chute Capacity <sup>5</sup>	Maximum 50 sheets (A4 (letter size) at 21 lb or 80 g/m <sup>2</sup> )	
Interface	USB 3.0 (USB 2.0 / USB 1.1 Compatible) <sup>6</sup>	
Wi-Fi Interface <sup>7</sup>	Observed standards	IEEE802.11b / IEEE802.11g / IEEE802.11n
	Communication mode	Infrastructure mode
	Frequency <sup>8</sup>	2.412 GHz to 2.462 GHz / 2.412 GHz to 2.472 GHz
	Communication distance	Indoors, 50 m (Recommended: indoors, within 25 m) *May vary depending on the surrounding environment and the access point to be connected
	Security <sup>9</sup>	WPA-PSK (TKIP / AES), WPA2-PSK (TKIP / AES), WEP (64-bit / 128-bit)
Power Requirement	WPS2.0 supported (button / PIN code)	
Power Consumption	AC 100 to 240 V, 50 / 60 Hz	
	USB connected	Operating Mode: 20 W or less Standby Mode: 1.6 W or less (Wi-Fi Switch Off)
Wi-Fi connected	Operating Mode: 20 W or less Standby Mode: 2.5 W or less	
	Operation Environment	Temperature: 41 to 95 °F (5 to 35 °C) Relative humidity: 20 to 80 % (No Condensation)
Dimensions (W x D x H) <sup>10</sup>	11.5(W) x 6.2(D) x 6.6(H) in. (292 x 159 x 168 mm)	
Device Weight	6.62 lb (3.0 kg)	
Environmental Compliance	ENERGY STAR <sup>®</sup> compliant / RoHS <sup>11</sup>	
Driver	Specific driver: • Windows <sup>®</sup> : Does not support Twain/ISIS <sup>®</sup> • Mac OS: Does not support Twain	
Limited Warranty	1 Year Limited Warranty. For full details, visit <a href="http://www.fcpa.fujitsu.com/warranties">www.fcpa.fujitsu.com/warranties</a> or call (800) 626-4686	
Service Options	In-warranty Upgrade: Advance Exchange. Post-Warranty: Advance Exchange Plus, Depot Plus, ScanAid Kit, Cleaning and Consumable Kit. For full details on all service programs, visit <a href="http://www.imagingService.com">www.imagingService.com</a>	

**1:** Scanning speeds may vary due to the system environment used. **2:** Documents measuring 5.8 inches (148 mm) in length or less are scanned in "Best Mode", while other documents are scanned in "Better Mode". **3:** Only Computer connection. **4:** ScanSnap iX500 is capable of scanning documents that exceed A4 size in length. ScanSnap iX500 supports the scanning of longer documents in all modes except in "Excellent Mode". **5:** Maximum capacity varies depending upon paper weight. **6:** Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. **7:** Only Android™ / iOS in case of Wi-Fi connection. **8:** Values depends on Country. **9:** IEEE802.1X Authentication is not supported. **10:** Excluding the stacker and other external attachments. **11:** PFI LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

Software	Windows <sup>®</sup>	Mac OS
Driver <sup>12,13</sup>	ScanSnap Manager V6.0	ScanSnap Manager V6.0
Applications	ScanSnap Organizer V5.0	—
	CardMinder™ V5.0	CardMinder™ V5.0
	ABBY FineReader for ScanSnap™ 5.0	ABBY FineReader for ScanSnap™ 5.0
	—	ABBY FineReader Express Edition for Mac 8.3
	Scan to Microsoft® SharePoint® 3.4	—
	Adobe® Acrobat® X Standard	—
Evernote for Win 4.5	—	Evernote for Mac 3.3

**12:** Twain or ISIS<sup>®</sup> applications cannot be used directly. **13:** "One button" image file JPEG, PDF and searchable PDF generation. These functions are operated with ScanSnap Manager (ScanSnap specific driver)

Included items	
<ul style="list-style-type: none"> <li>• 1 ScanSnap</li> <li>• 1 AC Cable</li> <li>• 1 AC Adapter</li> <li>• 1 USB cable (USB 3.0 Supported)</li> </ul>	<ul style="list-style-type: none"> <li>• 1 Safety Precautions</li> <li>• 1 Setup DVD-ROM</li> <li>• 1 Adobe® Acrobat® DVD-ROM (PC Only)</li> <li>• 1 ScanSnap Carrier Sheet</li> </ul>
	<ul style="list-style-type: none"> <li>• 1 Rack2-Filer Smart with Magic Desktop (Bundled with ScanSnap iX500 Deluxe Only)</li> </ul>

Consumables		
Description	Model Number	Remarks
Roller Set	PA03656-0001	Lifetime: Every 200,000 sheets or one year. (For ScanSnap iX500 only)
Cleaner F1	PA03950-0352	100 ml bottle For use on the Brake roller and Pick roller
Cleaning wipe	PA03950-0419	1 pack (24 sheets) For use on the Brake roller and Pick roller

\* These recommended lifetimes are for 21 lb, (80 g/m<sup>2</sup>) A4 sized documents. Therefore, appropriate replacement lifetimes may vary from other document types.

©2012 Fujitsu Computer Products of America, Inc. All rights reserved. Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu Limited. ABBYY™ FineReader™ Engine ©2011 ABBYY. OCR by ABBYY, ABBYY and FineReader are trademarks of ABBYY. Adobe, Acrobat are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Evernote is a registered trademark or trademark of Evernote Corporation. Google, Google Docs, Android and Google Play are registered trademarks or trademarks of Google Inc. Intel, Pentium, and Intel Core are registered trademarks or trademarks of Intel Corporation in the United States and other countries. ISIS<sup>®</sup> is a registered trademark of EMC Corporation in the United States. Mac, Mac OS, OS X, iPad, iPhone and App Store are trademarks of Apple Inc. Microsoft, Windows, Windows Vista, Excel, PowerPoint, SharePoint and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Word is the product of Microsoft Corporation in the United States. Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com, inc. in the United States and other countries. ScanSnap, ScanSnap logo, ScanSnap Manager, ScanSnap Organizer, CardMinder and Rack2-Filer are registered trademarks or trademarks of PFI LIMITED in Japan. Wi-Fi and Wi-Fi Protected Setup are trademarks of Wi-Fi Alliance. Other company names and product names are the registered trademarks or trademarks of the respective companies. Specifications are subject to change without notice. All statements herein are valid in the US for US residents only, are based on normal operating conditions, are for informational purposes only, and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. DS397001130

Windows <sup>®</sup>					
Compatible operating systems	Windows <sup>®</sup> 8 (32-bit / 64-bit)	Windows <sup>®</sup> 7 (32-bit / 64-bit)	Windows Vista <sup>®</sup> (32-bit / 64-bit)	Windows <sup>®</sup> XP (32-bit)	
Driver/ Application <sup>14,15</sup>	ScanSnap Manager V6.0	Supported	Supported	Supported <sup>16</sup>	
	ScanSnap Organizer V5.0	Supported	Supported	Supported <sup>16</sup>	
	CardMinder™ V5.0	Supported	Supported	Supported <sup>16</sup>	
	ABBY FineReader for ScanSnap™ 5.0	Supported	Supported	Supported <sup>16</sup>	
	Scan to Microsoft® SharePoint® 3.4	Supported	Supported	Supported <sup>16</sup>	
	Adobe® Acrobat® X Standard <sup>16</sup>	Supported <sup>19</sup>	Supported	Supported <sup>16</sup>	
Hardware Requirements	Evernote for Win 4.5	Supported	Supported	Supported <sup>16</sup>	
	CPU <sup>20</sup>	Intel® Core™ 2 Duo 2.2 GHz or higher (Recommended: Intel® Core™ i5 2.5 GHz or higher)			
	Memory Capacity <sup>20</sup>	64-bit: 2 GB or more (Recommended: 4 GB or more) 32-bit: 1 GB or more (Recommended: 4 GB or more)			
	Display	1,024 x 768 pixels or higher 800 x 600 pixels or more			
	Disk Capacity <sup>21</sup>	4,010 MB free hard disc space for installation			
	DVD-ROM Drive	Required for installation			
USB Port <sup>20,22</sup>	USB3.0 <sup>23</sup> / USB2.0 / USB1.1				

**14:** This product supports Microsoft® Windows®. **15:** Please refer to the ScanSnap Website for latest support information. **16:** For use with Service pack 2 or higher. **17:** For use with Service pack 3 or higher. **18:** Requires Internet Explorer 7.0 or later, or Firefox 3.5 or later. **19:** Please refer to Adobe Systems Incorporated website for latest support information. **20:** Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. **21:** .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager, ScanSnap Organizer or CardMinder™ for systems that do not have .NET Framework 3.5 SP1 installed. **22:** ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. **23:** Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. \* System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Mac OS			
Compatible operating systems	Mac OS x v10.8	Mac OS X v10.7	Mac OS X v10.6
Driver/ Application <sup>24,25</sup>	ScanSnap Manager V6.0	Supported	Supported <sup>26</sup>
	CardMinder™ V5.0	Supported	Supported <sup>26</sup>
	ABBY FineReader for ScanSnap™ 5.0	Supported	Supported <sup>26</sup>
	ABBY FineReader Express Edition for Mac 8.3	Supported	Supported <sup>26</sup>
Hardware Requirements	Evernote for Mac 3.3	Supported	Supported <sup>26</sup>
	CPU <sup>28</sup>	Intel® Core™ 2 Duo 2.2 GHz or higher (Recommended: Intel® Core™ i5 2.5 GHz or higher)	
	Memory Capacity <sup>28</sup>	2 GB or more (Recommended: 4 GB or more)	
	Display	1,024 x 768 pixels or more	
	Disk Capacity	2,090 MB free hard disc space for installation	
DVD-ROM Drive	Required for installation		
USB Port <sup>28,29</sup>	USB3.0 <sup>30</sup> / USB2.0 / USB1.1		

**24:** This product supports Mac operating systems. **25:** Please refer to the ScanSnap Website for latest support information. **26:** Recommended: 10.7.4 or later. **27:** Recommended: 10.6.8 or later. **28:** Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. **29:** ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. **30:** Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. \* System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Rack2-Filer Smart V1.0 / Magic Desktop V1.0 <sup>31,32,33</sup> System Requirements (Bundled with ScanSnap iX500 Deluxe only)					
Compatible operating systems	Windows <sup>®</sup> 8 (32-bit / 64-bit) <sup>34</sup>	Windows <sup>®</sup> 7 (32-bit / 64-bit) <sup>35</sup>	Windows Vista <sup>®</sup> (32-bit / 64-bit) <sup>36</sup>	Windows <sup>®</sup> XP (32-bit) <sup>37</sup>	
Hardware Requirements	CPU	Intel® Pentium® 4 1.8 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)			
	Memory capacity	2 GB or more (Recommended: 4 GB or more)			
	Display	1,024 x 768 pixels or higher			
	Disk Capacity	System drive <sup>38</sup>	—	64-bit: 2 GB or more	—
Supported scanners	Installation drive	—	32-bit: 850 MB or more	—	
	*Additional space is required for the data created by Rack2-Filer Smart and Magic Desktop				
Supported scanners					
ScanSnap iX500, S1500, S1500M, S1300i, S1300, S1100					
Supported mobile devices	Model	iPad series, iPhone series (4 or later), iPod touch series (4th generation or later)			
	OS	iOS 4.3 or later			
	Application	Rack2-Filer Smart for iOS1.1.0 or later			

**31:** This product only supports Microsoft® Windows®. **32:** Please refer to the Rack2-Filer Smart Website and the Magic Desktop Website. **33:** When installing Magic Desktop, Internet connection is required. **34:** Rack2-Filer Smart and Magic Desktop runs as a desktop application. **35:** For use with Service pack 1 or higher. **36:** For use with Service pack 2 or higher. **37:** For use with Service pack 3 or higher. **38:** This is the free capacity required when .NET Framework 4 is not installed.

Options		
Description	Model Number	Remarks
ScanSnap Carrier Sheets <sup>39</sup>	PA03360-0013	5 Carrier Sheets Intended for ScanSnap iX500, S1500, S1500M, S510, S510M, S500 and S500M
ScanSnap Bag	PA03951-0651	Intended for ScanSnap iX500, S1500, S1500M, S510, S510M, S500 and S500M

**39:** Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 127 g/m<sup>2</sup> or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

**Fujitsu Computer Products of America, Inc.**  
1250 East Arques Avenue Sunnyvale, CA 94085-4701 (800) 626-4686 (408) 746-6000  
• [info@fcpa.fujitsu.com](mailto:info@fcpa.fujitsu.com) • <http://us.fujitsu.com/fcpa>

